

stored energy solutions for a demanding world



Model: EosG3000A

EosG Series

The EosG range of gel technology batteries offers outstanding performance including a 15+ years design life. The EosG series batteries is designed based on the Eos series, using the polymer gel electrolyte. Built to the highest standards and compliant with the latest IEC60896-21/22 standard.this range also offers 100% capacity out-of-the-box and is capable of handling deep discharges for complete peace of mind.



Specifications

Battery Model	EosG3000A			
Nominal Voltage	2V			
Capacity (25°C)	10HR(300A,1.80V)	3HR(750A,1.80V)		1HR (1650A, 1.75V)
	3000AH	2250AH		1650AH
Dimensions	Length	Width	Height	Total Height
	496mm	363mm	361.7mm	373.5mm
Approx. Weight	175kg			
Internal Resistance	0.10mΩ			
Max Charge Current Allowed	750A			
Charge Voltage (25°C)	Cycle use		Float use	
	2.35V/cell		2.25V/cell	
Temperature Ranges	Operation (maximum):		-40°C to 55°C(-40°F to 131°F)	
	Operation (recommended):		15°C to 25°C(59°F to 77°F)	
	Storage:		-20°C to 40°C(-4°F to 104°F)	
Terminal	M8 Female			
Terminal Hardware Torque	15 ± 1.0Nm			
Container Material	ABS (V0 optional)			

Constant Current Discharge Characteristics Units: Amperes (25°C, 77°F)

End voltage per cell	5min	15min	30min	1h	2h	3h	5h	6h	8h	10h	24h	48h	100h
1.60V	4365.1	3672.9	2984.7	1966.9	1211.2	889.2	575.5	495.9	388.2	318.3	147.5	78.8	44.2
1.65V	4093.3	3457.1	2722.0	1856.5	1176.8	865.3	568.4	490.0	384.9	316.5	145.4	78.1	43.5
1.70V	3846.9	3271.6	2489.2	1764.0	1136.4	826.4	554.2	478.1	379.3	311.6	144.8	77.5	42.8
1.75V	3628.9	3079.3	2295.2	1653.7	1094.6	807.5	544.7	471.1	374.1	308.9	143.5	76.6	41.7
1.80V	3428.4	2871.8	2149.0	1568.9	1061.7	782.4	528.6	458.6	364.1	304.8	140.5	75.3	40.4
1.85V	2943.5	2442.7	1889.3	1396.8	957.0	724.2	498.9	436.7	352.3	292.4	136.4	71.6	39.0
1.90V	2410.7	1928.6	1570.0	1148.0	800.0	643.9	451.8	393.9	317.7	266.4	127.4	66.9	36.0

Discharge Data with Constant Power Units: Watts per cell (25°C, 77°F)



End voltage per cell	5min	15min	30min	1h	2h	3h	4h	5h	6h	8h	10h	24h
1.60V	8453.4	7079.8	5637.3	4014.2	2590.1	1918.6	1529.9	1267.2	1082.3	845.9	690.7	311.4
1.65V	8039.9	6794.3	5332.0	3709.2	2376.1	1800.5	1451.2	1223.0	1047.8	814.7	674.2	305.5
1.70V	7729.7	6553.0	5199.1	3532.1	2307.2	1736.6	1402.0	1195.4	1027.2	796.9	654.3	299.6
1.75V	7488.5	6306.8	5021.8	3394.4	2225.5	1672.6	1372.5	1165.9	1003.6	767.4	644.4	296.6
1.80V	7281.7	6011.4	4844.6	3315.7	2184.2	1613.6	1328.2	1133.4	974.0	747.8	634.6	292.2
1.85V	6621.9	5474.8	4308.0	3015.6	2007.1	1528.0	1277.1	1080.3	922.4	723.2	610.0	280.4
1.90V	5844.0	4751.1	3633.5	2597.4	1741.5	1416.8	1189.0	1009.5	861.9	676.5	565.7	262.7

stored energy solutions for a demanding world

NARADA

Model: **EosG3000A**

EosG Series

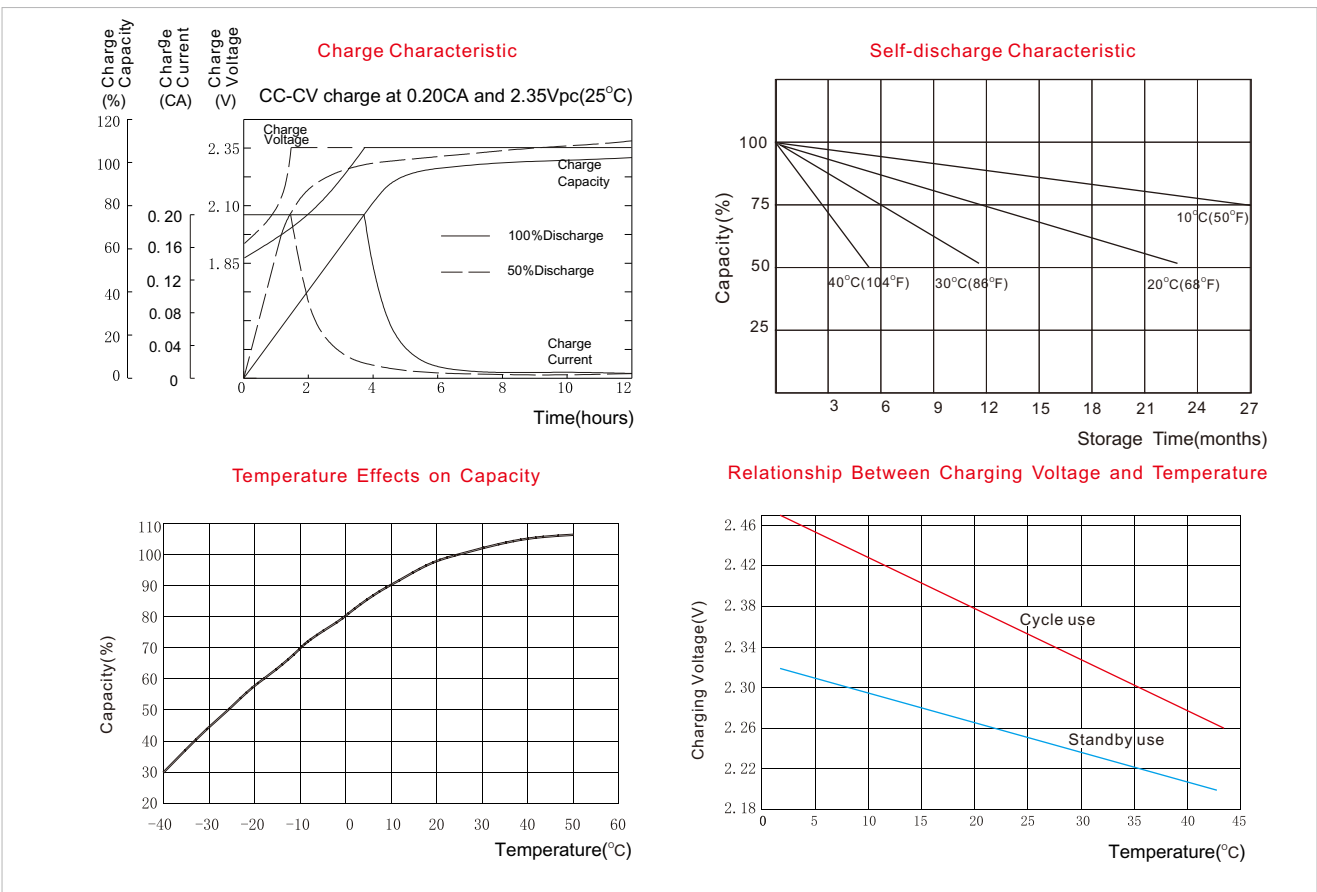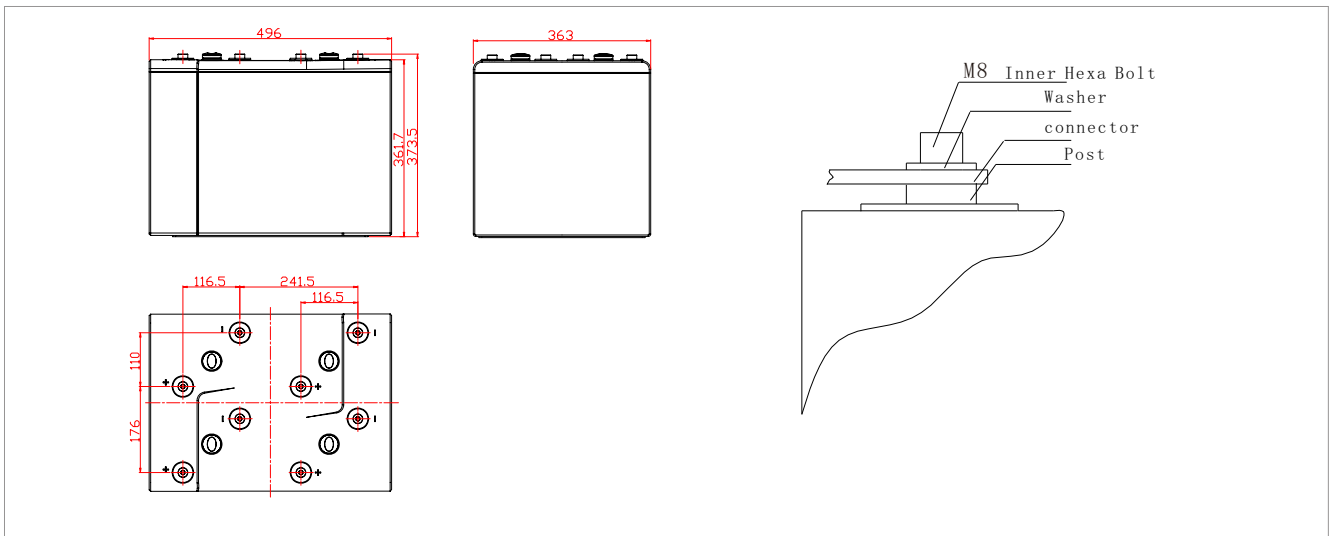

NARADA POWER SOURCE CO.,LTD.
 9F, Building A, No. 50 Zijinghua Road, Hangzhou, China
 Tel: +86-571-28827013 Fax: +86-571-28828290
 Website: www.naradabattery.com E-mail: intl@narada.biz

NARADA ASIA PACIFIC PTE.LTD.
 65 Ubi Crescent #07-05 HOLA centre, Singapore
 Tel: +65-6848 1191 Fax: +65-6749 3498
 E-mail: sales@narada.com.sg

NARADA EUROPE (UK) LIMITED
 Spectrum House, Dunstable Road, Redbourn,
 St. Albans, Herts AL3 7PR
 Tel: +44 (0)845 371 7095 Fax: +44 (0)845 612 2031
 E-mail: sales@naradaeurope.com



EosG3000-04-N-EN (Ver.04 July 2012) Subject to revision without prior notice. E. & O.E.