

stored energy solutions for a demanding world



## Model: 48NPFC75

## NPFC Series

Narada NPFC series is a complete range of 48V LiFePO<sub>4</sub> (Lithium Iron phosphate) battery products, for a wide variety of applications, such as telecom base station, UPS, renewable energy system, etc., with advanced life, standard size, light weight and strong environmental adaptability.




### Battery Management System(BMS)

For standard Narada lithium battery module, BMS is applied to monitor voltage, current, temperature of cells and module, take protections against over-charge, over-discharge, over-current, over-temperature, under-temperature and short circuit, etc., and provide cell balancing and current limitation during charging process to ensure a reliable safety and excellent performance.

Meantime, Narada supply customized upper computer software for BMS communication via RS232 or RS485 to set parameters or read monitoring data.

### Dimensions-mm

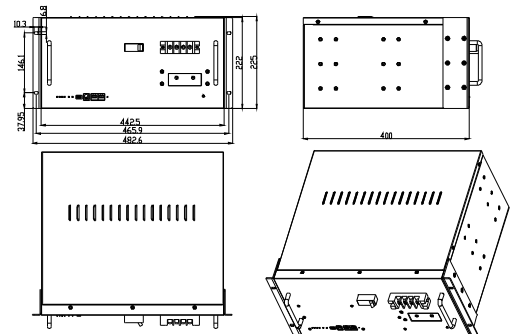

### Specifications

Battery Specification		
Rated Voltage		48V
Rated Capacity		75Ah (C <sub>5</sub> , 0.2C to 40.5V at 25°C)
Discharge Current (Max.)		75A
Discharge End Voltage		40.5V
Charge Current (Recomm.)		15A
Charge Current (Max.)		75A
Charge Voltage		54±0.5V
Dimensions	Width	442.5mm (17.42 inches)
	Depth	400mm (15.75 inches)
	Height	225mm (8.86 inches, 5U)
Typical Weight		44.0kg
Layout of Front Panel		
Status Indicators		SOC / ALM / RUN
Communication Ports		RS232 / RS485*2
Communication in Parallel		15 modules in maximum
Reset Key		Available
Terminal Size		M6 (Screw size)
LCD Screen		Optional
Breaker		Available
Maintenance Interface		Available
Operation Environments		
Temperature Range	Discharge	-20 to +60 °C
	Charge	0 to +60 °C
	Storage	0 to +40 °C
Temperature Recommendation	Discharge	+15 to +35 °C
	Charge	+15 to +35 °C
	Storage	+15 to +30 °C
Humidity		5% to 95%

Model: 48NPFC75

NPFC Series



Constant Current Discharge Characteristics (25°C,77°F)

End voltage	Current(A)									
	0.1C	0.15C	0.2C	0.25C	0.3C	0.4C	0.5C	0.6C	0.8C	
	Time									
	Hours									
46.5	9.59	6.34	4.71	3.70	3.02	2.21	1.70	1.34	0.87	
45.0	9.78	6.49	4.85	3.87	3.20	2.39	1.89	1.55	1.13	
43.5	9.91	6.57	4.92	3.92	3.26	2.44	1.95	1.61	1.19	
42.0	9.99	6.64	4.97	3.96	3.29	2.47	1.97	1.64	1.22	
40.5	10.05	6.68	5.00	3.99	3.32	2.49	1.98	1.66	1.24	
39.0	10.08	6.71	5.03	4.01	3.34	2.50	2.00	1.66	1.24	

Discharge Data with Constant Power (25°C,77°F)

End voltage	Power							
	358W	715W	1080W	1430W	1800W	2145W	2500W	
	Time							
	Hours							
46.50	10.46	5.06	3.21	2.34	1.76	1.40	1.13	
45.00	10.65	5.21	3.39	2.52	1.97	1.62	1.35	
43.50	10.77	5.28	3.45	2.57	2.03	1.68	1.43	
42.00	10.85	5.32	3.48	2.60	2.05	1.71	1.45	
40.50	10.90	5.35	3.50	2.61	2.07	1.71	1.46	
39.00	10.93	5.37	3.51	2.63	2.08	1.73	1.47	

Performance Curves

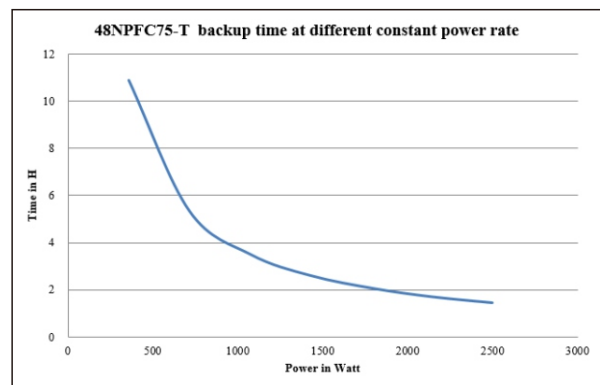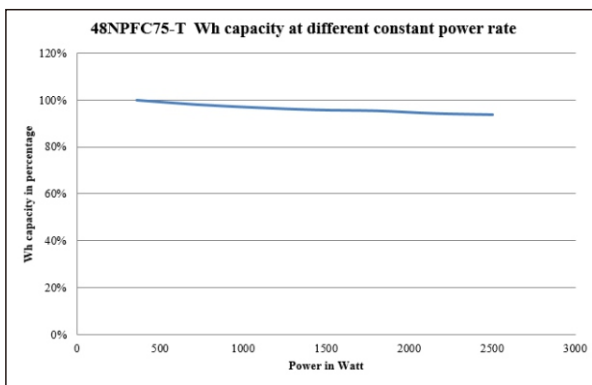

**NARADA POWER SOURCE CO.,LTD.**  
 2F, Building B, No. 48 Zijinghua Road, Hangzhou, China  
 Tel:+86-571-56975980/56975956 Fax:+86-571-56975955  
 Website:www.naradapower.com E-mail: intl@narada.biz

**NARADA ASIA PACIFIC PTE.LTD.**  
 65 Ubi Crescent #07-05 HOLA centre, Singapore  
 Tel: +65-6848 1191 Fax: +65-6749 3498  
 E-mail: sales@narada.com.sg

**NARADA EUROPE (UK) LIMITED**  
 Spectrum House, Dunstable Road, Redbourn,  
 St. Albans, Herts AL3 7PR  
 Tel: +44 (0)845 371 7095 Fax:+44 (0)845 612 2031  
 E-mail: sales@naradaeurope.com

