

**ICS series**

**ICS-2000**


Narada's ICS series battery designed to provide highcycling and fast charge performance, idea for telecom service where power supply is unstable. With innovative structure design, high quality manufacturing and high quality material, ICS batteries are also capable of PSoC, hybrid, renewable energy storage application and other cycling/standby applications.



**Specifications**

<b>Battery Model</b>	<b>ICS-2000</b>	
Nominal voltage	2V	
Capacity	2000Ah (10HR ,200A, 1.80V, 25°C)	
Approx.Weight	150.0kg	
Internal Resistance	Approx 0.12mΩ	
Max Charge Current Allowed	500A	
Charge Voltage (25°C)	Cycle use	Float use
	2.35V/cell	2.27V/cell
Temperature Ranges	Operation(maximum): -40°C to 55°C (-40°F to 131°F)	
	Operation(recommended): 15°C to 25°C ( 59°F to 77°F)	
	Storage: -20°C to 40°C (-4°F to 104°F)	
Terminal	M8 Female	
Terminal Hardware	15 ± 1.0 N.m	
Container Material	ABS (V0 optional)	

**Dimensions (mm)**

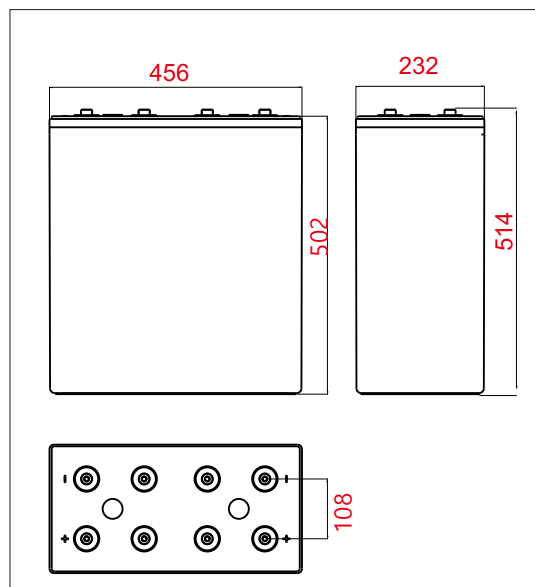

**Constant Current Discharge Data Units: Amperes (25°C, 77°F)**

End voltage per cell	15min	20min	30min	40min	50min	1h	2h	3h	5h	8h	10h
1.65V	2260	2060	1600	1450	1290	1120	680	515	355	235	215
1.70V	2100	1830	1540	1420	1250	1110	670	510	350	230	212
1.75V	1850	1650	1480	1300	1200	1105	660	505	345	227	208
1.80V	1600	1480	1310	1240	1120	1102	650	502	340	225	204


**Constant Power Discharge Data Units: Watts per cell (25°C, 77°F)**

End voltage per cell	15min	20min	30min	40min	50min	1h	2h	3h	5h	8h	10h
1.65V	3600	3300	2900	2500	2180	1880	1180	900	650	429	380
1.70V	3300	3050	2700	2450	2100	1850	1150	880	630	416	370
1.75V	3100	2900	2400	2300	2050	1700	1140	850	605	399	350
1.80V	2900	2500	2200	2250	2000	1600	1120	830	550	363	310


**ICS series**

**ICS-2000**


**Discharge Voltage vs Time Curve ( 25°C )**

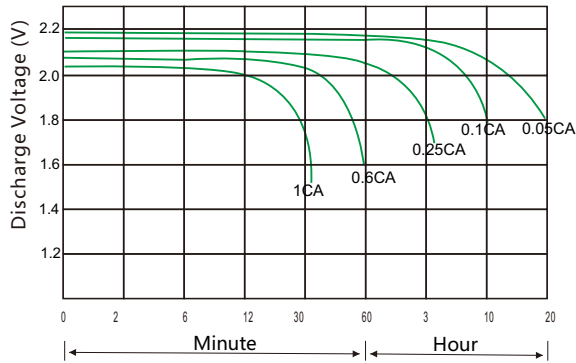


**Charge Curve (25°C)**

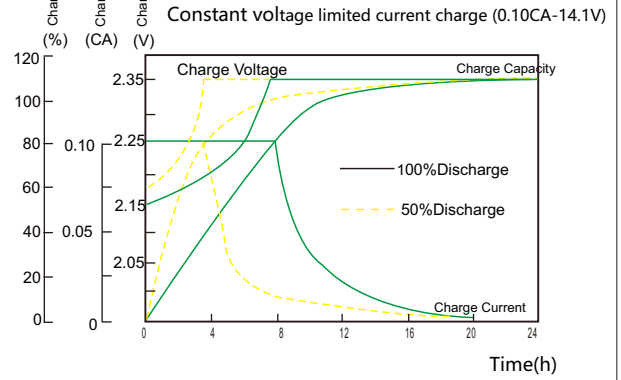


**Capacity vs temperature curve**

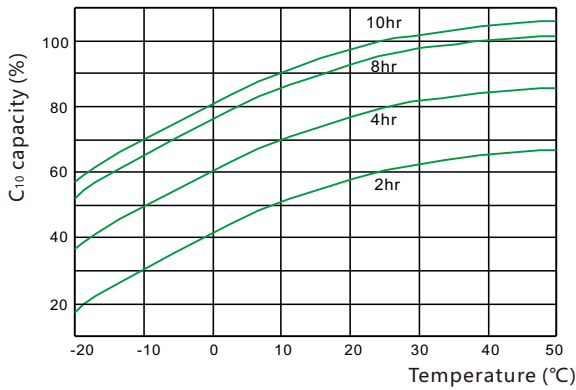


**Residual Capacity vs Storage Time**

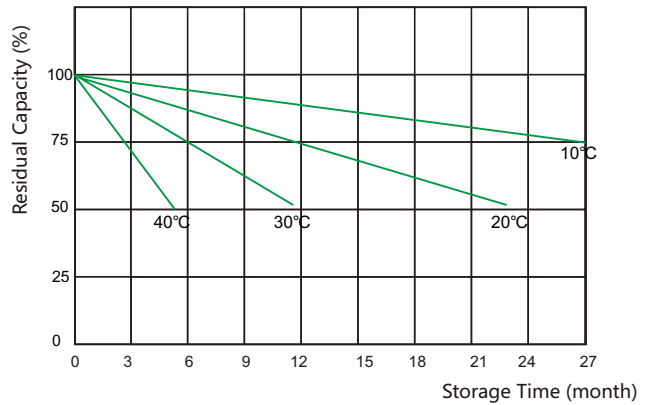

**Capacity vs OCV curve**

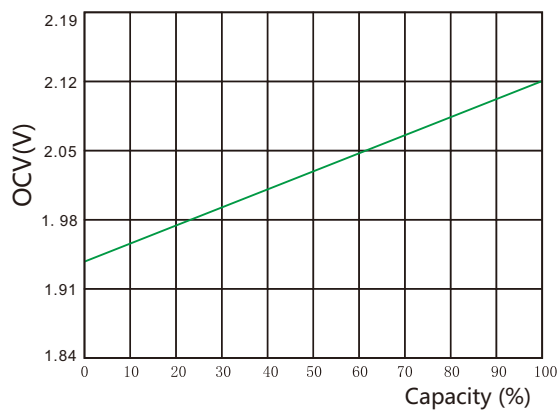

**Design life vs temperature**

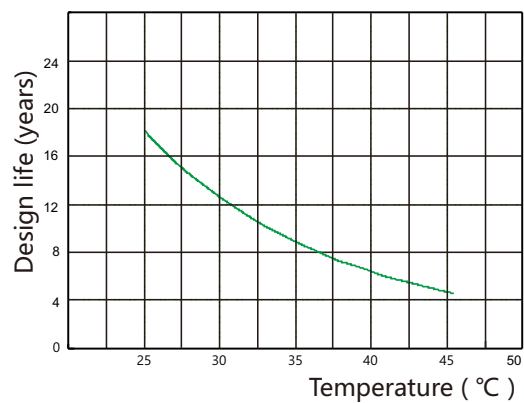

**NARADA POWER SOURCE CO.,LTD.**  
 Building A, No.822 Wen'er West Road, Hangzhou, China  
 Tel:+86-571-56975980 Fax:+86-571-56975955  
 E-mail: intl@narada.biz  
 Website:www.naradapower.com

**NARADA ASIA PACIFIC PTE.LTD.**  
 Block 9 Khaki Bukit Road 1 #02-10 Eunos Technolink,  
 Singapore 415938 Email: sales@narada-ap.com  
 Tel: +65-6848 1191 Fax: +65-6749 3498  
 Website: [www.narada-ap.com](http://www.narada-ap.com)

**NARADA EUROPE (UK) LIMITED**  
 Spectrum House, Dunstable Road, Redbourn,  
 St. Albans, Herts AL3 7PR  
 Tel: +44 (0)845 371 7095 Fax:+44 (0)845 612 2031  
 E-mail: sales@naradaeurope.com

